

PHILIPS

30-880106


XITANIUM MINI, white, non-dimmable, secondary wire cross-section up to 1.5mm², primary wire cross-section up to 2.5mm², protection against overheating and short-circuiting, mains overvoltages, overload, ceiling cut-out = 53mm, adjustable via DIP-SWITCH (see B3): Constant current
L156mm, W=43mm, H=30mm
220-240V 50/60Hz



TECHNICAL DETAILS

System performance [W]	30
Dimmability	not dimmable
Voltage	220-240V 50/60Hz
Length [mm]	156
Width [mm]	43
Height [mm]	30
Ceiling cutout [mm]	53
IP protection class	IP20
IP protection class	protection cl. II
Material	synthetic
Colour of body	white
Lifetime [h]	50 000
Number of luminaires B16A	54
Net weight [kg]	0.12
EAN number	9010870551848

SKETCH

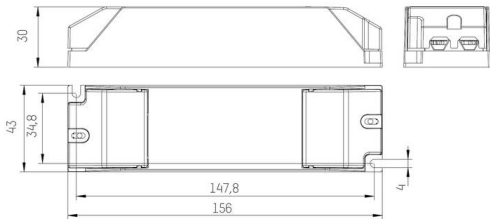

LIGHT DISTRIBUTION CURVE

mA	W	V DC
350	15	5-44
400	17	5-44
450	19	5-44
500	22	5-44
550	24	5-44
600	26	5-44
650	28	5-44
700	30	5-44



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.