
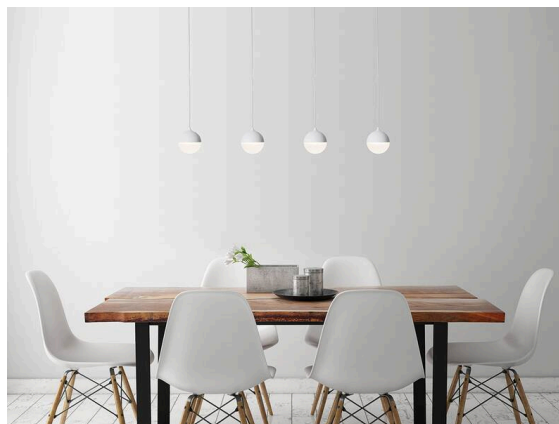



## GILO

472-2429150

GILO PD SUSPENSION made of aluminium, white, similar to RAL 9003, satined, light output direct, with converter, max. 500mA, dimmability: not dimmable, cable white, pendant length 2000mm, IP20

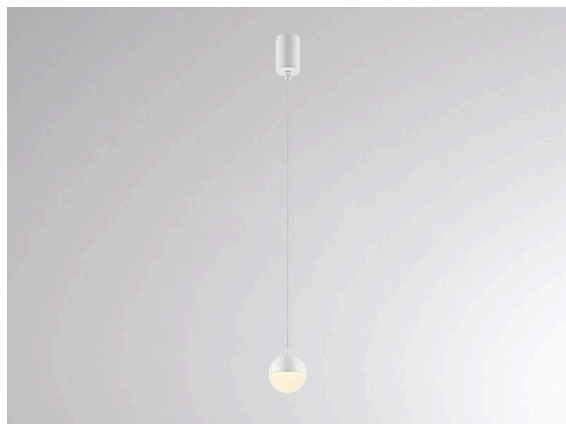

## LIGHT DISTRIBUTION CURVE

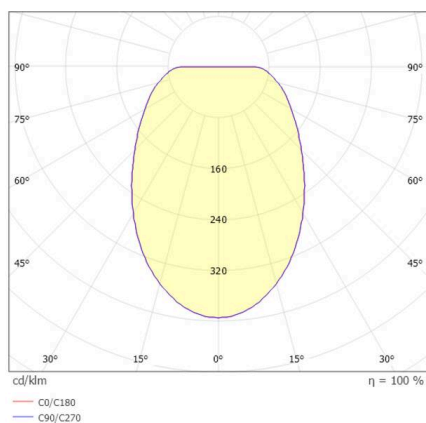

## TECHNICAL DETAILS

Light source	LED
System performance [W]	5,5
Luminous flux [lm]	390
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Voltage	220-240V 50/60Hz
Height [mm]	90
Length pendant [mm]	2000
Diameter [mm]	80
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	white
RAL	9003
Colour of glass/shade	satined
Cable	white
Lifetime [h]	L80 B10 20 000
Energy efficiency class	D
Net weight [kg]	0.76
EAN number	9010506027150



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.