

SUNRAY

8-20519505


SUNRAY IV R RECESSED DOWNLIGHT made of aluminium, white, similar to RAL 9003, beam 50°, light output direct, without converter, max. 500/700/1050mA, dimmability: see converter, IP40/IP20



TECHNICAL DETAILS


Light source	LED 21W/29W/43W
Luminous flux [lm]	2300/3050/4150
Current sec. [mA]	500/700/1050
Colour temperature	3000K
CRI	>80
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	50°
Height [mm]	110
Diameter [mm]	230
Ceiling cutout [mm]	205
Ceiling thickness [mm]	max. 20mm
Mounting depth [mm]	140
IP protection class	IP40/IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 20 000
Energy efficiency class	F
Net weight [kg]	1.65
EAN number	9010506054910

SKETCH

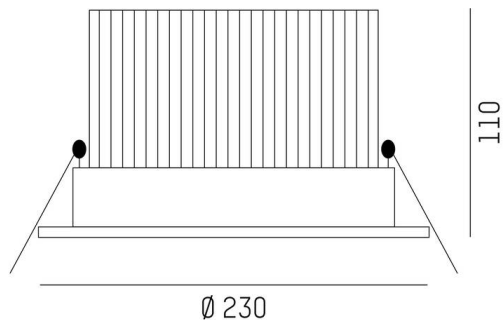

Energy label

LIGHT DISTRIBUTION CURVE

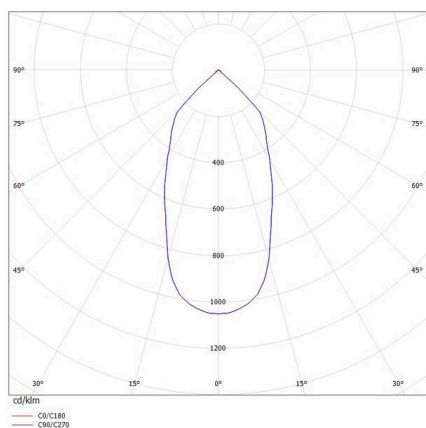

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.