




## RUBE PDI

757-lr1204700bs

RUBE PDI SUSPENSION made of aluminium, black, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, dimmability: not dimmable, cable transparent, pendant length 2500mm, IP20

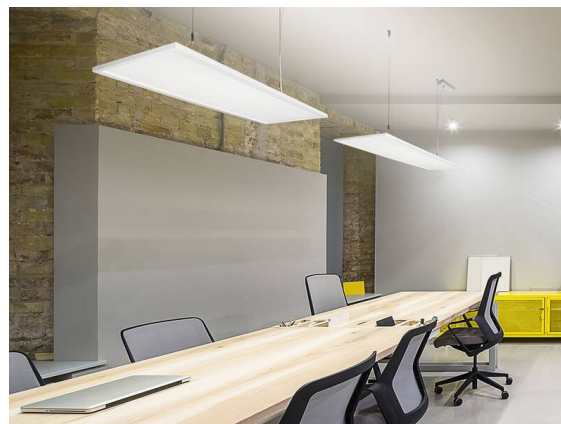

## SKETCH

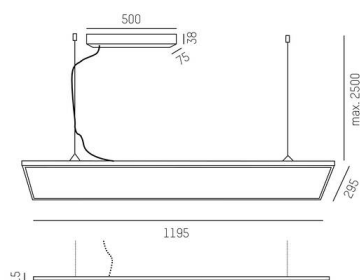

## TECHNICAL DETAILS


|                        |                      |
|------------------------|----------------------|
| Light source           | LED                  |
| System performance [W] | 35                   |
| Luminous flux [lm]     | 3500                 |
| Colour temperature     | 4000K                |
| CRI                    | >80                  |
| UGR                    | <19                  |
| Optics                 | microprismatic cover |
| Converter              | with converter       |
| Dimmability            | not dimmable         |
| Light emission area    | direct / indirect    |
| Voltage                | 220-240V 50/60Hz     |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 1195             |
| Width [mm]          | 295              |
| Height [mm]         | 15               |
| Length pendant [mm] | 2500             |
| IP protection class | IP20             |
| IP protection class | protection cl. I |

|                         |             |
|-------------------------|-------------|
| Material                | aluminium   |
| Colour of body          | black       |
| Cable                   | transparent |
| Lifetime [h]            | 50 000      |
| Energy efficiency class | D           |

|                 |               |
|-----------------|---------------|
| Net weight [kg] | 5.08          |
| EAN number      | 9010979523562 |

## LIGHT DISTRIBUTION CURVE

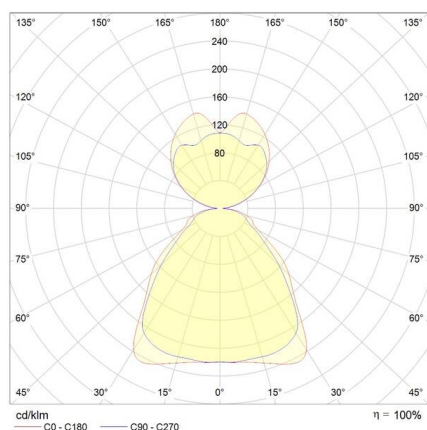

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.