



## PONTOS

305-619936b27k

PONTOS ROUND RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, beam 36°, light output direct, tilting 30°, without converter, max. 350mA, dimmability: see converter, IP44/IP20

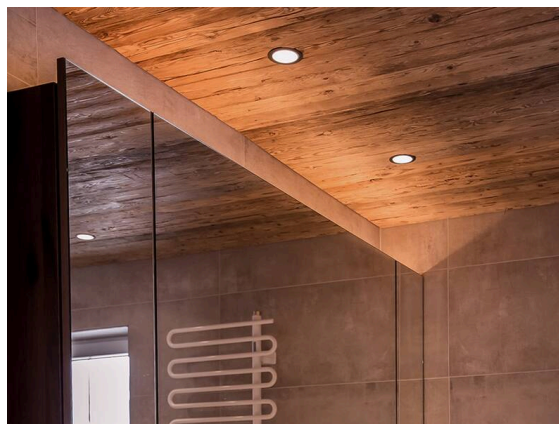


## SKETCH

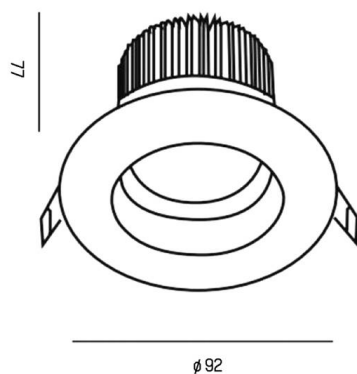

## TECHNICAL DETAILS

|                         |                    |
|-------------------------|--------------------|
| Light source            | LED 13W            |
| Luminous flux [lm]      | 1245               |
| Current sec. [mA]       | 350                |
| Colour temperature      | 2700K              |
| CRI                     | >80                |
| Converter               | without converter  |
| Dimmability             | see converter      |
| Light emission area     | direct             |
| Beam angle [°]          | 36°                |
| Voltage                 | 36 VDC             |
| Height [mm]             | 83                 |
| Diameter [mm]           | 90                 |
| Ceiling cutout [mm]     | 83                 |
| Mounting depth [mm]     | 119                |
| IP protection class     | IP44/IP20          |
| IP protection class     | protection cl. III |
| Material                | aluminium          |
| Colour of body          | black              |
| RAL                     | 9005               |
| Lifetime [h]            | L80 B10 50 000     |
| Energy efficiency class | E                  |
| Net weight [kg]         | 0.24               |
| EAN number              | 9010506044935      |

## LIGHT DISTRIBUTION CURVE

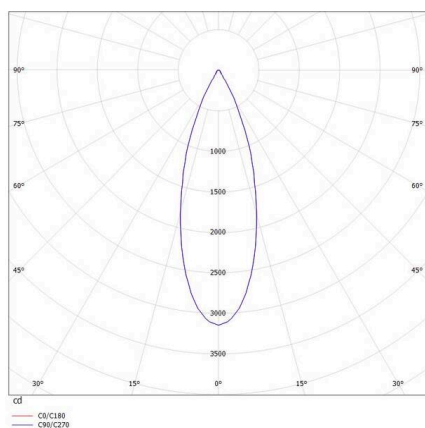

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.