
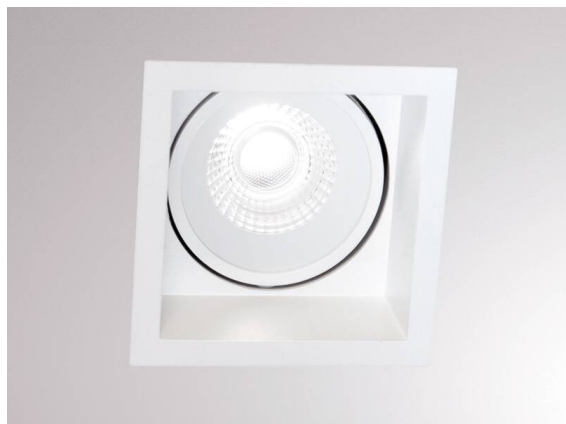
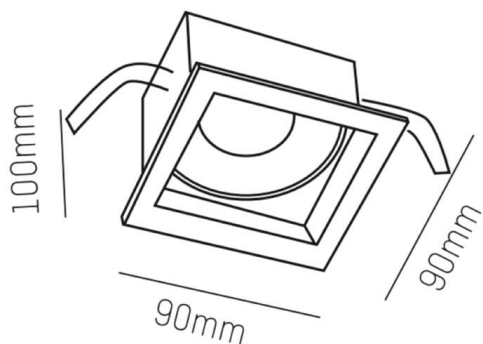


PONTOS**305-624824w40k**

PONTOS SQUARE RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003, beam 24°, light output direct, tilting 30°, without converter, max. 350mA, dimmability: see converter, IP44/IP20

**SKETCH****LIGHT DISTRIBUTION CURVE****TECHNICAL DETAILS**

Light source	LED 13W
Luminous flux [lm]	1630
Current sec. [mA]	350
Colour temperature	4000K
CRI	>80
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	24°
Voltage	36 VDC
Length [mm]	89
Width [mm]	89
Height [mm]	80
Ceiling cutout [mm]	78x78
Mounting depth [mm]	110
IP protection class	IP44/IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Net weight [kg]	0.30
EAN number	9010506045031

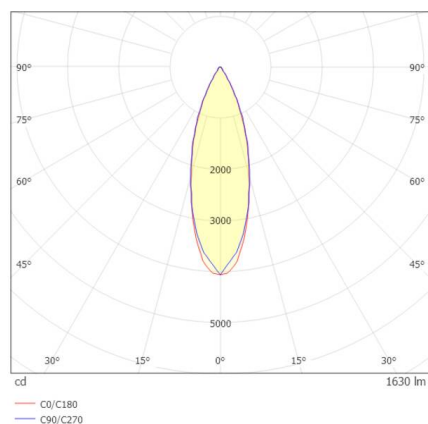

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.