


MOON

139-0030680004005

MOON SQUARE R RECESSED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, satined PMMA opal diffuser beam 110°, light output direct, without converter, max. 250mA, dimmability: see converter, IP44/IP20



SKETCH

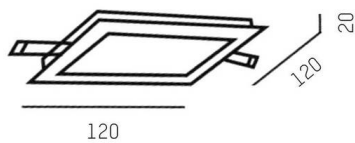

TECHNICAL DETAILS

Light source	LED 6,5W
Luminous flux [lm]	785
Current sec. [mA]	250
Colour temperature	4000K
CRI	>80
Optics	PMMA opal diffuser
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle [°]	110°
Voltage	25 VDC

Length [mm]	120
Width [mm]	120
Height [mm]	10
Ceiling cutout [mm]	105x105
Mounting depth [mm]	54
IP protection class	IP44/IP20
IP protection class	protection cl. III


Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 50 000
Energy efficiency class	C
Number of luminaires B16A	50

Net weight [kg]	0.18
EAN number	9010506687415



Energy label

LIGHT DISTRIBUTION CURVE

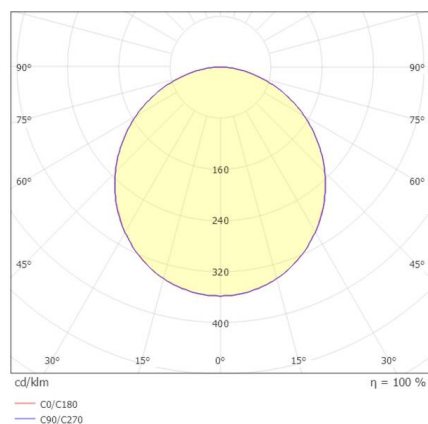

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.