


PANA

712-013100501405d

PANA 625 R RECESSED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare beam 90°, light output direct, UGR <19, with converter, max. 300-1050mA, dimmability: DALI 2, cable white, IP20

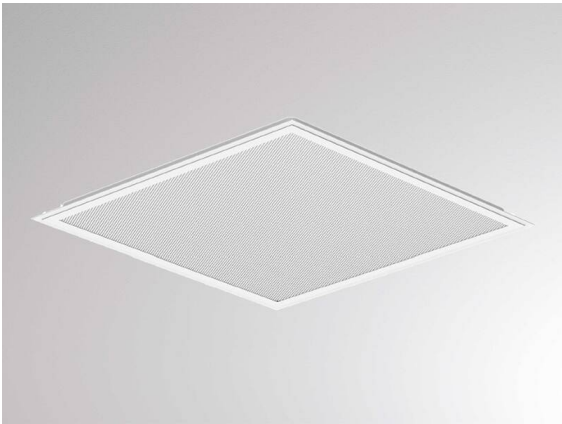

TECHNICAL DETAILS

Light source	LED
System performance [W]	12-38
Current sec. [mA]	300-1050
Colour temperature	4000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	with converter
Dimmability	DALI 2
Light emission area	direct
Beam angle [°]	90°
Voltage	220-240V 50/60Hz
Length [mm]	620
Width [mm]	620
Height [mm]	30
Ceiling cutout [mm]	605x605
Ceiling thickness [mm]	5-30
Mounting depth [mm]	155
IP protection class	IP20
IP protection class	protection cl. II
IK value	IK02
Material	aluminium
Colour of body	white
RAL	9016
Cable	white
Lifetime [h]	L80 B10 50 000
Energy efficiency class	C
Number of luminaires B16A	50
Net weight [kg]	2.32
EAN number	9010506758849



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.