


PANA


712-0129005014050

PANA 625 R RECESSED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare beam 90°, light output direct, UGR <19, with converter, max. 300-1050mA, dimmability: not dimmable, cable white, IP20

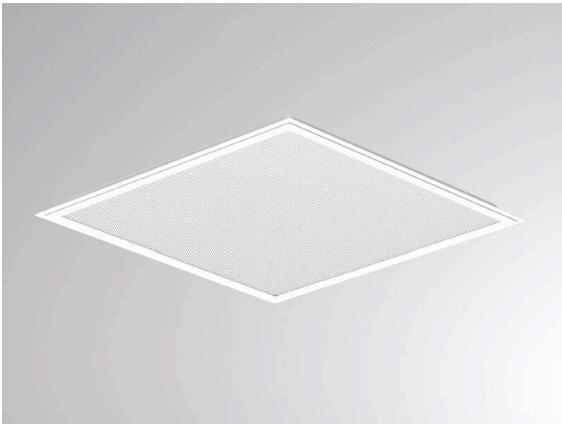

| Leuchte PANA BACKLITE 625 90° 840 Mikroprismatisch |                                       |                                                                                                                                                   |                            |               |               |               |               |               |               |               |               |               |
|----------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Leuchte                                            | Abstrahlwinkel<br>Einstrahlwinkel [K] | Farbtemperatur [Ra]                                                                                                                               | Systemleistung Leuchte [W] |               |               |               |               |               |               |               |               |               |
|                                                    |                                       |                                                                                                                                                   | 12                         | 15            | 18            | 22            | 24            | 26            | 28            | 30            | 34            | 38            |
| PANA BACKLITE 625 90° MIKROPRISMATISCH 840         | 90 4000 83                            | Lichtstrom Leuchte [lm]<br>Blendwert [BGR]                                                                                                        | 1.620<br>< 19              | 2.025<br>< 19 | 2.430<br>< 19 | 2.835<br>< 19 | 3.240<br>< 19 | 3.645<br>< 19 | 4.050<br>< 19 | 4.360<br>< 22 | 4.770<br>< 22 | 5.180<br>< 22 |
| Zubehör PANA BACKLITE 625                          |                                       |                                                                                                                                                   |                            |               |               |               |               |               |               |               |               |               |
| Artikelnummer                                      | Anzahl                                | Bezeichnung                                                                                                                                       | Detail                     |               |               |               |               |               |               |               |               |               |
| 712-0580000000000                                  | 1                                     | Anschlusskabel T-verbinder 5-polig steckbar                                                                                                       | 03185 Code 2 Buchse        |               |               |               |               |               |               |               |               |               |
| 712-0580000000000                                  | 1                                     | Aufbauhalter PANA Backlite 625(42x70mm weiß)<br>Klapphalter PANA Backlite<br>625 für gerahmte Decken und<br>Decken mit verdeckten<br>Tragschienen |                            |               |               |               |               |               |               |               |               |               |
| 712-0570000000000                                  | 1                                     |                                                                                                                                                   | SET vork.                  |               |               |               |               |               |               |               |               |               |

SKETCH

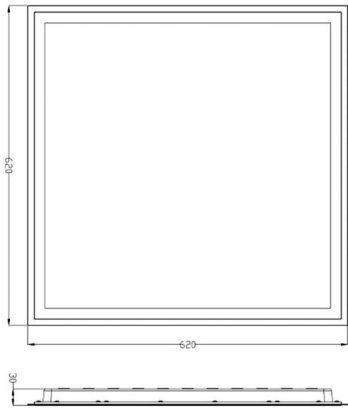

TECHNICAL DETAILS


Light source LED  
System performance [W] 12-40  
Current sec. [mA] 300-1050  
Colour temperature 4000K  
CRI >80  
UGR <19  
Optics microprismatic cover  
Converter with converter  
Dimmability not dimmable  
Light emission area direct  
Beam angle [°] 90°  
Voltage 220-240V 50/60Hz

Length [mm] 620  
Width [mm] 620  
Height [mm] 30  
Ceiling cutout [mm] 605x605  
Ceiling thickness [mm] 5-30  
Mounting depth [mm] 155  
IP protection class IP20  
IP protection class protection cl. II  
IK value IK02

Material aluminium  
Colour of body white  
RAL 9016  
Cable white  
Lifetime [h] L80 B10 50 000  
Energy efficiency class C

Net weight [kg] 2.29  
EAN number 9010506774764

LIGHT DISTRIBUTION CURVE

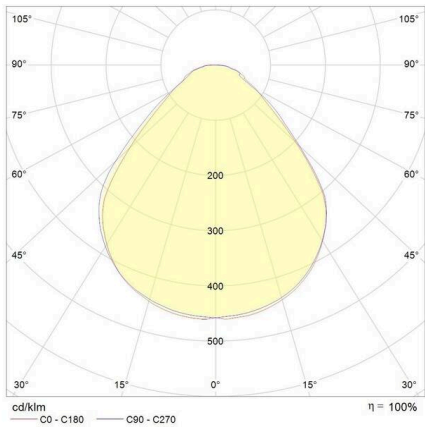

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.