


PANA


712-0129005014050

PANA 625 R RECESSED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare beam 90°, light output direct, UGR <19, with converter, max. 300-1050mA, dimmability: not dimmable, cable white, IP20

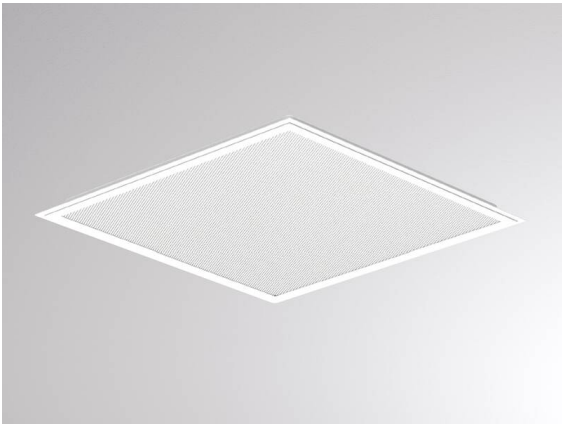

Leuchte PANA BACKLITE 625 90° 840 Mikroprismatisch														
Leuchte	Abstrahlwinkel Einstrahlwinkel [K] Einstrahlwinkel (°)	Stromleistung Treiber (mA)	Systemleistung Leuchte (W)											
			12	15	18	22	24	26	28	30	34	38	40	
PANA BACKLITE 625 90° MIKROPRISMATISCH 840	90	4000	83	1.820	2.020	2.420	2.800	3.135	3.375	3.615	3.850	4.300	4.750	5.000
				Berwart. (BGR)										
				< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 19	< 22	< 22	< 22
Zubehör PANA BACKLITE 625														
Artikelnummer	Menge	Bezeichnung	Detail											
712-05800000000000	1	Anschlusskabel T-verbinder 5-polig steckbar	03185 Code 2 Buchse											
712-05800000000000	1	Aufbaukasten PANA Backlite 625(4x570mm weiß)												
		Klebefolien PANA Backlite 625 für geradlinige Decken und Decken mit verdeckten Tragschienen	SET 40x											

SKETCH

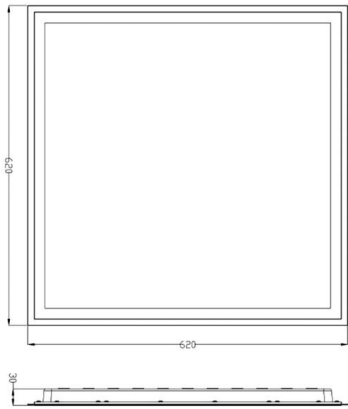

TECHNICAL DETAILS


Light source LED
System performance [W] 12-40
Current sec. [mA] 300-1050
Colour temperature 4000K
CRI >80
UGR <19
Optics microprismatic cover
Converter with converter
Dimmability not dimmable
Light emission area direct
Beam angle 90°
Voltage 220-240V 50/60Hz

Length [mm] 620
Width [mm] 620
Height [mm] 30
Ceiling cutout [mm] 605x605
Ceiling thickness [mm] 5-30
Mounting depth [mm] 155
IP protection class IP20
IP protection class protection cl. II
IK value IK02

Material aluminium
Colour of body white
RAL 9016
Cable white
Lifetime [h] L80 B10 50 000
Energy efficiency class C

Net weight [kg] 2.29
EAN number 9010506774764

LIGHT DISTRIBUTION CURVE

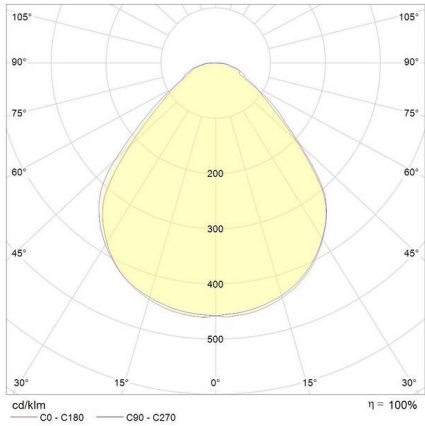

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.