

DESCO

341-t2419150

DESCO S TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9003, satined PMMA opal diffuser beam 115°, light output direct, with converter, max. 500mA, dimmability: not dimmable, adapter/ceiling base white, IP20



TECHNICAL DETAILS


Light source	LED
System performance [W]	15
Luminous flux [lm]	850/935/940
Current sec. [mA]	500
Colour temperature	2700K/3000K/4000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle [°]	115°
Voltage	220-240V 50/60Hz

Height [mm]	50
Diameter [mm]	240
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02

Material	aluminium
Colour of body	white
RAL	9003
Colour of adapter / ceiling base	white
Lifetime [h]	L80 B10 20 000
Energy efficiency class	E
Number of luminaires B16A	160


Net weight [kg]	0.79
EAN number	9010506782561

SKETCH

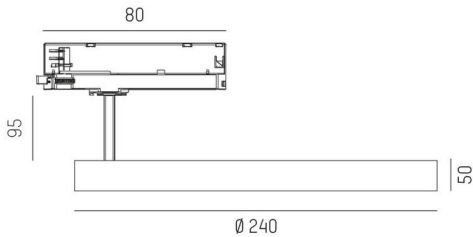

Energy label

LIGHT DISTRIBUTION CURVE

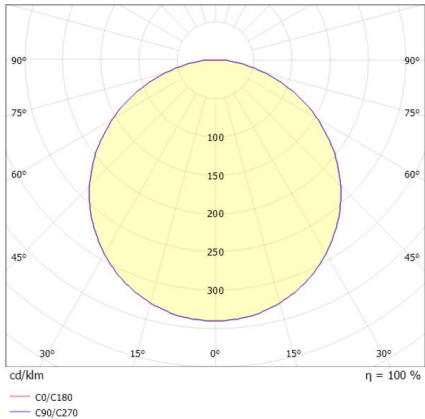

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.