



AEON

305-652530w

AEON ROUND SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, beam 45°, light output direct, with converter, max. 250mA, dimmability: not dimmable, IP65

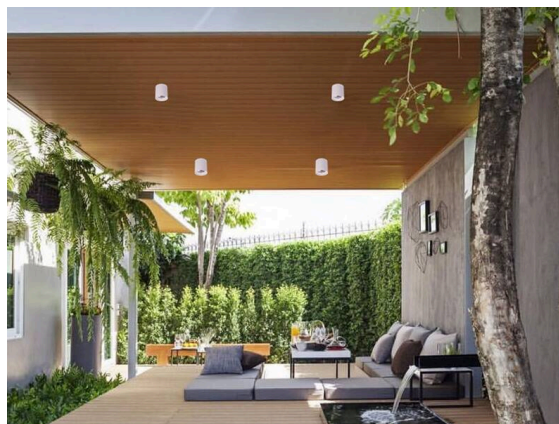


SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	11
Luminous flux [lm]	1070
Current sec. [mA]	250
Colour temperature	3000K
CRI	>80
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	45°
Voltage	220-240V 50/60Hz
Height [mm]	105
Diameter [mm]	80
IP protection class	IP65
IP protection class	protection cl. I
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 50 000
Energy efficiency class	F
Number of luminaires B16A	42
Net weight [kg]	0.40
EAN number	9010979316126

LIGHT DISTRIBUTION CURVE

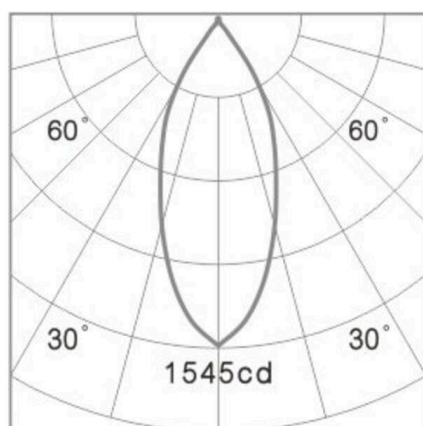

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.