


## MAG

55-00004

MAG TRACK SET TRACK SPOTLIGHT SET WITH 3-PHASE ADAPTER made of aluminium, black, similar to RAL 9005, high quality glass lens beam 40°, light output direct, swiveling 350°, tilting 90°, with converter, max. 500mA, dimmability: phase section, IP20



## SKETCH

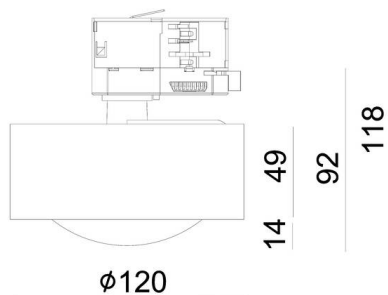

## TECHNICAL DETAILS

Light source	LED
System performance [W]	26W
Luminous flux [lm]	2x1290lm
Current sec. [mA]	500
Colour temperature	2700K
CRI	90
Optics	high quality glass lens
Converter	with converter
Dimmability	phase section
Light emission area	direct
Beam angle	40°
Voltage	220-240V 50/60Hz
Length [mm]	1000
Height [mm]	103
Diameter [mm]	120
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 50 000
Energy efficiency class	F
Net weight [kg]	2.41
EAN number	9010870567481



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.