


AUTLED

322-ud3000


1-channel universal dimmer, max. 5A, separate interfaces for DALI, 1-10V, PUSH, sync cable slot for up to 9 slave devices in 1-10V or PUSH mode, order strain relief accessory separately

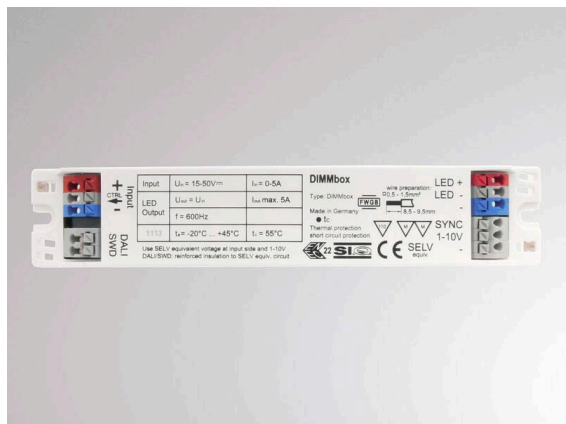

TECHNICAL DETAILS

Converter	without converter
Dimmability	DALI, 1-10V, Push
Voltage	15-50 VDC
Length [mm]	153
Width [mm]	30
Height [mm]	21
IP protection class	IP20
IP protection class	protection cl. III
Material	synthetic
Colour of body	white
Net weight [kg]	0.06
EAN number	9010346007411

SKETCH

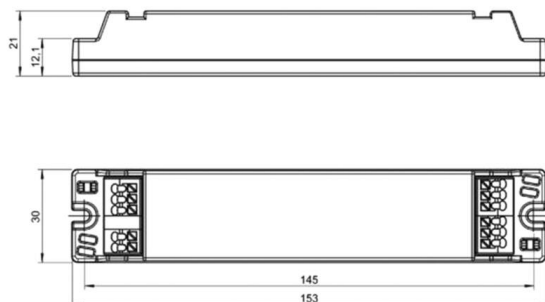

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.