


SANI

627-0332014152452

SANI SANIERUNGSEINSATZ MOUNTING RAIL LIGHT INSERT made of steel sheet, white, high quality plastic lens beam 60°, light output direct, with multilumen power supply, dimmability: DALI 2, IP40



SKETCH

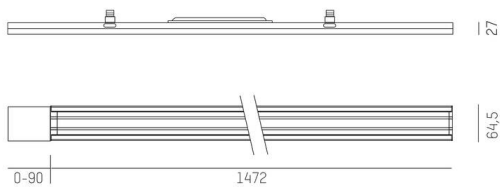

TECHNICAL DETAILS


Light source	LED
System performance [W]	29-75
Luminous flux [lm]	5900-14500
Colour temperature	4000K
CRI	80
Optics	high quality plastic lens
Converter	with multilumen power supply
Dimmability	DALI 2
Light emission area	direct
Beam angle [°]	60°
Voltage	220-240V 50/60Hz

Length [mm]	1472+ MAX90
Width [mm]	64,5
Height [mm]	27
IP protection class	IP40
IP protection class	protection cl. I
IK value	IK03

Material	steel sheet
Colour of body	white
Lifetime [h]	L90 B50 50000
Ambient temperature	from -20° to +35°

Net weight [kg]	2.38
EAN number	9010979324183

LIGHT DISTRIBUTION CURVE

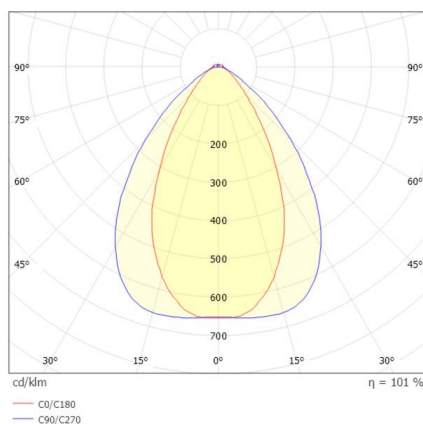

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.