MAG

222-00392

MAG MINI SD SQ SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005,high quality glass lens beam 45°, light output direct, UGR <16, with converter, max. 500mA, dimmability: phase section, IP44



Technical details

Light source	LED
System performance [W]	11
Luminous flux [lm]	890/970
Current sec. [mA]	500
Colour temperature	2700/3000K
CRI	>90
UGR	<16
Optics	high quality glass lens
Converter	with converter
Dimmability	phase section
Light emission area	direct
Beam angle	45°
Voltage	220-240V 50/60Hz
Length [mm]	90
Width [mm]	90
Height [mm]	75
IP protection class	IP44
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 50 000
Ambient temperature	from -20° to +40°
Energy efficiency class	D
Number of luminaires B16A	200
EAN number	9010979720572

Energy label

Sketch

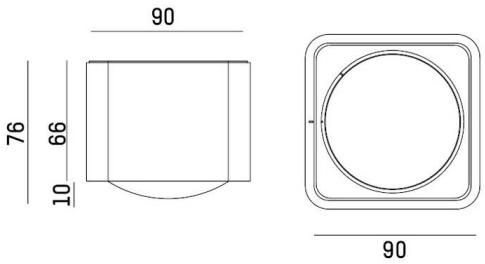

Light distribution curve

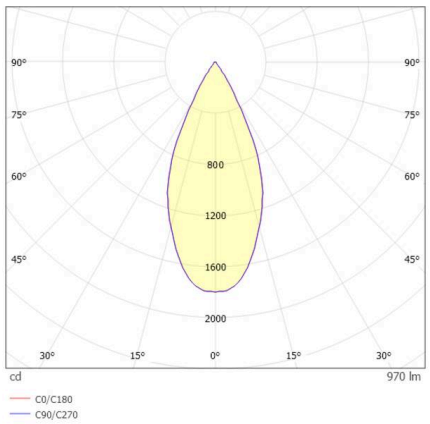

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.