



OSMONT

789-42775

AURA E27 SD SURFACE MOUNTED CEILING LUMINAIRE made of steel sheet, white, triplex opal glass white, light output direct, dimmability: see light source, IP44 without lamp,

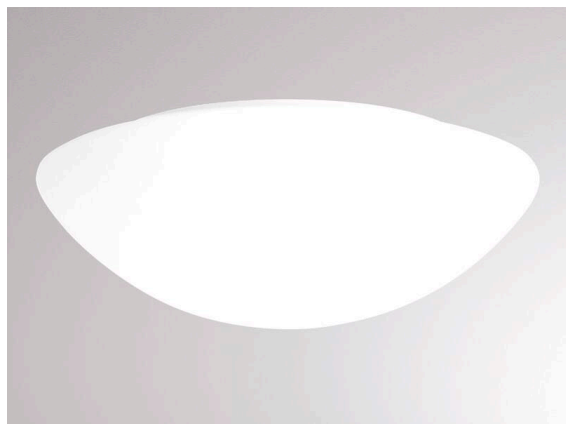


SKETCH



TECHNICAL DETAILS

| | |
|------------------------|--------------------|
| Light source | AGL A60 ECO 57W |
| System performance [W] | 2X25 |
| Number of sockets | 2x |
| Socket | E27 |
| Luminous flux [lm] | see light source |
| Optics | triplex opal glass |
| Dimmability | see light source |
| Light emission area | direct |
| Voltage | 220-240V 50/60Hz |
| Height [mm] | 125 |
| Diameter [mm] | 420 |
| IP protection class | IP44 |
| IP protection class | protection cl. I |
| Material | steel sheet |
| Colour of body | white |
| Colour of glass/shade | white |
| Lifetime [h] | see light source |
| Net weight [kg] | 2.60 |
| EAN number | 8591728427757 |

LIGHT DISTRIBUTION CURVE

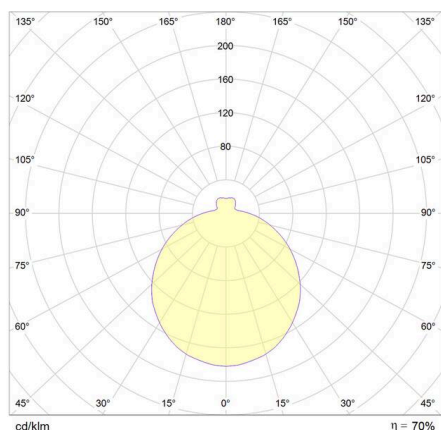

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.