



OSMONT

789-53316


DELIA WALL / CEILING LUMINAIRE made of steel sheet, white, similar to RAL 9003, polycarbonate cover white, light output direct, with converter, dimmability: not dimmable, without motion detector, IP54

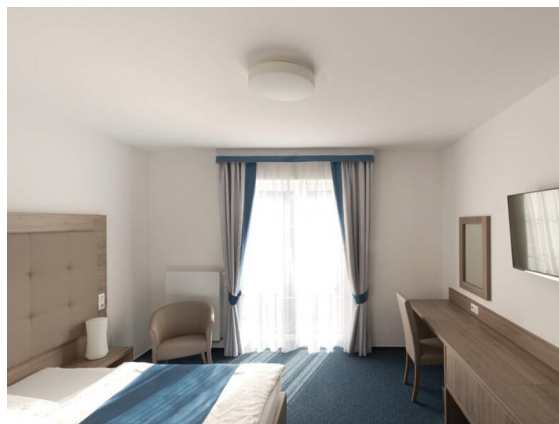

SKETCH

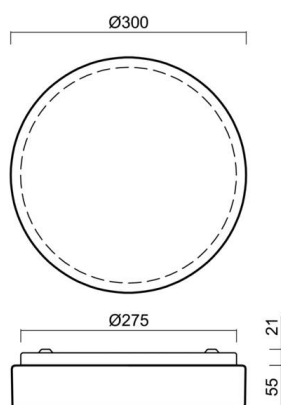

LIGHT DISTRIBUTION CURVE

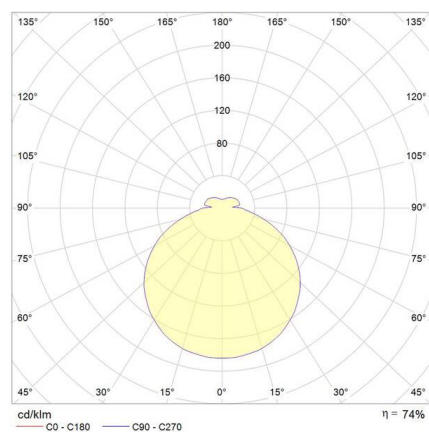

TECHNICAL DETAILS

Light source	LED
System performance [W]	19
Luminous flux [lm]	1920
Colour temperature	3000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Voltage	220-240V 50/60Hz
Motion detector	without motion detector
Height [mm]	75
Diameter [mm]	300
IP protection class	IP54
IP protection class	protection cl. I
IK value	IK10
Material	steel sheet
Colour of body	white
RAL	9003
Colour of glass/shade	white
Lifetime [h]	50 000
Energy efficiency class	D
Number of luminaires B16A	52
Net weight [kg]	1.10
EAN number	8591728533168



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.