
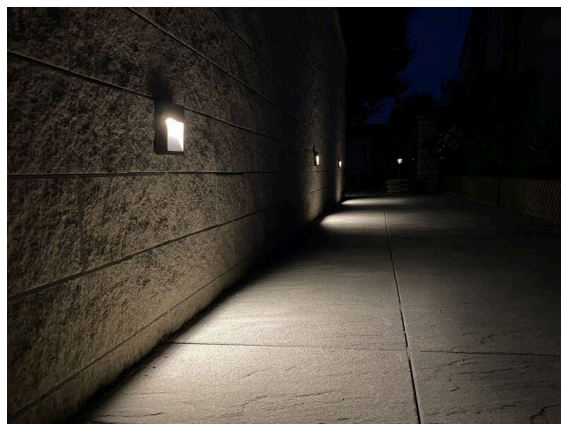



GHIDINI

57-gh1137caxp300en19

MAXIVERSO SURFACE MOUNTED WALL LUMINAIRE made of aluminium, light grey, microprismatic PMMA cover for perfect anti-glare beam asymmetric, light output direct, with converter, dimmability: not dimmable, IP65

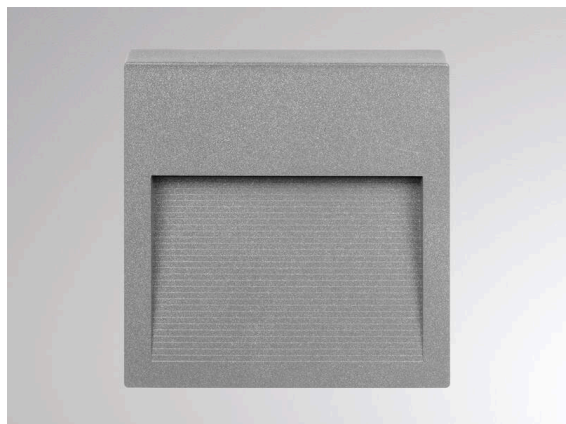


SKETCH

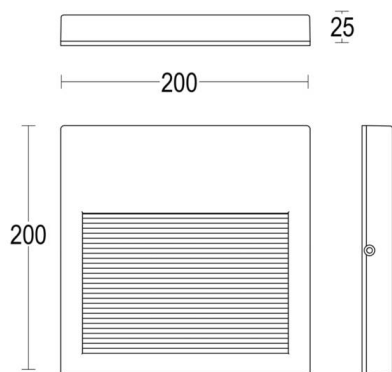

TECHNICAL DETAILS

Light source	LED
System performance [W]	10
Luminous flux [lm]	98
Colour temperature	3000K
CRI	>90
Optics	microprismatic cover
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	asymmetric
Voltage	220-240V 50/60Hz
Length [mm]	200
Width [mm]	200
Height [mm]	25
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK09
Material	aluminium
Colour of body	light grey
Lifetime [h]	L80 B10 60 000
Energy efficiency class	E
Net weight [kg]	0.90

LIGHT DISTRIBUTION CURVE

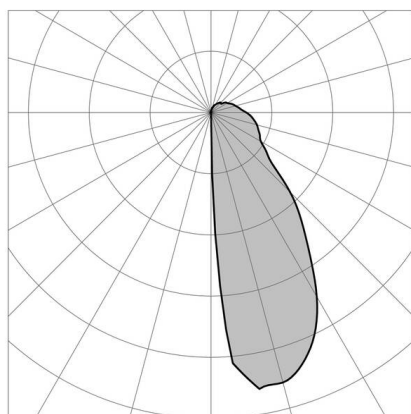

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.