## DISANO

## 125-41491100


MINI RODIO ASYM FLOODLIGHTS made of aluminium, grey,transparent glass beam asymmetric, light output direct, tilting 90°, with converter, dimmability: not dimmable, IP66








### Sketch

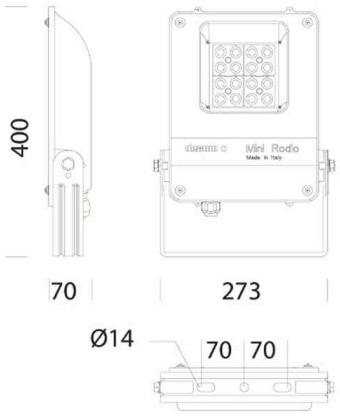


### Technical details

| | |
|---|---|
| Light source | LED |
| System performance [W] | 73 |
| Luminous flux [lm] | 11436 |
| Colour temperature | 4000K |
| CRI | >80 |
| Optics | transparent glass |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct |
| Beam angle | asymmetric |
| Voltage | 220-240V 50/60Hz |
| | |
| Length [mm] | 273 |
| Width [mm] | 70 |
| Height [mm] | 400 |
| IP protection class | IP66 |
| IP protection class | protection cl. II |
| IK value | IK08 |
| | |
| Material | aluminium |
| Colour of body | grey |
| Lifetime [h] | 80 000 |
| Ambient temperature | from -20° to +40° |
| Energy efficiency class | C |
| | |
| Net weight [kg] | 3.72 |
| EAN number | 8012952146011 |

### Light distribution curve

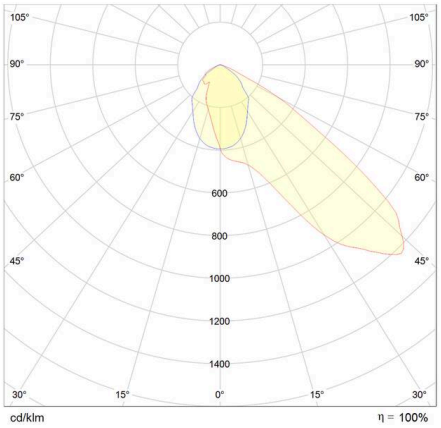


CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.