

FOSNOVA


121-2217251539

ENERGY 2180 RECESSED DOWNLIGHT made of aluminium, white, beam 100°, light output direct, with converter, max. 250/350/400/500mA, dimmability: not dimmable, IP44/IP20 adjustable by means of DIP-SWITCH converter,




DIP-SWITCH Einstellungen 121-2217251500				
I out	W tot	Kelvin	Lumen	CRI
250	9	4000K	1114	CRI 90
350	13	4000K	1560	CRI 90
400	14	4000K	1777	CRI 90
500	19	4000K	2182	CRI 90

Sketch

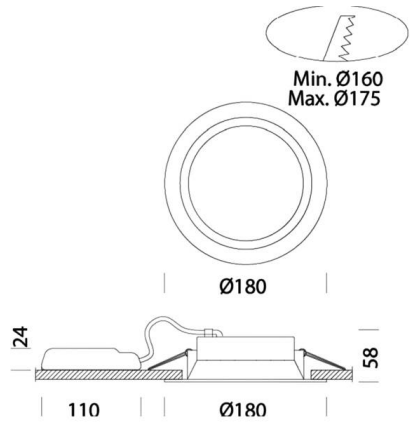

Light distribution curve

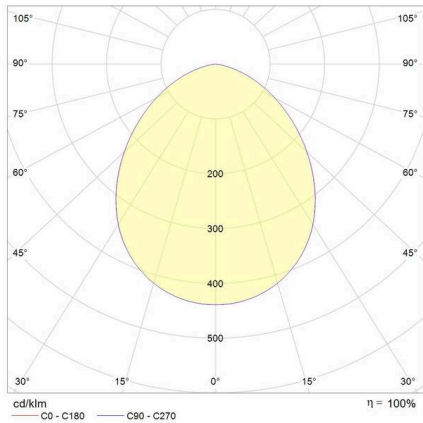

Technical details

Light source	LED
System performance [W]	9/13/14/19
Luminous flux [lm]	1097/1536/1702/2135
Current sec. [mA]	250/350/400/500
Colour temperature	3000K
CRI	>90
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	100°
Voltage	220-240V 50/60Hz
Height [mm]	58
Diameter [mm]	180
Ceiling cutout [mm]	160-175
Mounting depth [mm]	88
IP protection class	IP44/IP20
IP protection class	protection cl. II
IK value	IK07
Material	aluminium
Colour of body	white
Lifetime [h]	L80 B20 55 000
Energy efficiency class	E
Net weight [kg]	0.44
EAN number	8016535144531



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.