

SUBLINE

222-00397

SUBLINE PRIZM M TRACK SPOTLIGHT WITH 3 PH ADAPTER black, similar to RAL 9005, microprismatic PMMA cover for perfect anti-glare beam 82°, light output direct, UGR <28, max. 750mA, dimmability: on/off, IP20




TECHNICAL DETAILS

Light source	LED
System performance [W]	27,5
Luminous flux [lm]	3620
Current sec. [mA]	750
Colour temperature	3000K
CRI	>90
UGR	<28
Optics	microprismatic cover
Dimmability	on/off
Light emission area	direct
Beam angle	82°
Voltage	220-240V 50/60Hz
Length [mm]	1025
Width [mm]	25
Height [mm]	31
IP protection class	IP20
IP protection class	protection cl. I
Colour of body	black
RAL	9005
Lifetime [h]	50 000 L80 B10
Energy efficiency class	C
Number of luminaires B16A	52


Net weight [kg]	1.00
EAN number	9010979786721

SKETCH

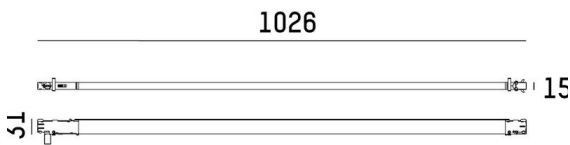

Energy label

LIGHT DISTRIBUTION CURVE

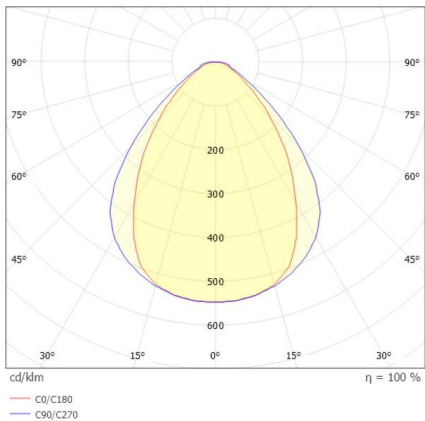

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.