


**MOTUS**

**56-53312ng2**

MOTUS LONG W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, satined chrome, high quality glass lens beam 60°, light output direct, tilting 360°, with converter, dimmability: not dimmable, IP20




**SKETCH**

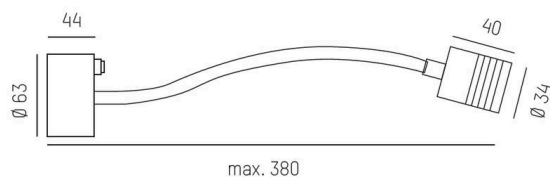

**TECHNICAL DETAILS**

Light source	LED
System performance [W]	2
Luminous flux [lm]	160
Colour temperature	3000K
CRI	>90
Optics	high quality glass lens
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	60°
Voltage	220-240V 50/60Hz
Length [mm]	380
Diameter [mm]	34
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	satined chrome
Lifetime [h]	50 000
Energy efficiency class	E
Net weight [kg]	0.33
EAN number	9010506372410

**LIGHT DISTRIBUTION CURVE**

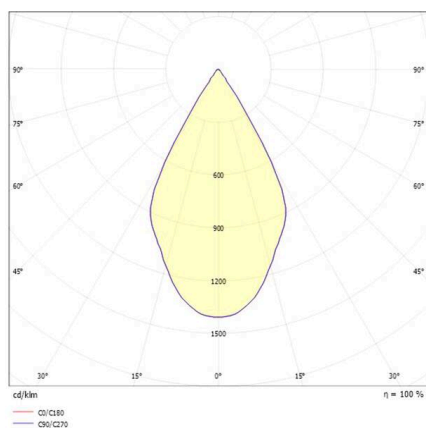

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.