

SAVO

726-1122001224050

SAVO 21 R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9016, high-efficiently vacuum deposited aluminium reflector beam 17°, light output direct, swiveling 355°, tilting 30°, without converter, max. 350/500/700/800mA, dimmability: see converter, IP20



TECHNICAL DETAILS

Light source	LED 12W/17W/24W/28W
Luminous flux [lm]	1730/2390/3200/3580
Current sec. [mA]	350/500/700/800
Colour temperature	4000K
CRI	>90
Optics	vacuum deposited aluminium reflector
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	17°

Length [mm]	154
Width [mm]	154
Height [mm]	110
Ceiling cutout [mm]	140x140
Ceiling thickness [mm]	1-20
Mounting depth [mm]	140
IP protection class	IP20
IP protection class	protection cl. II


Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	C

Net weight [kg]	0.58
EAN number	9010979784703




Energy label

SKETCH

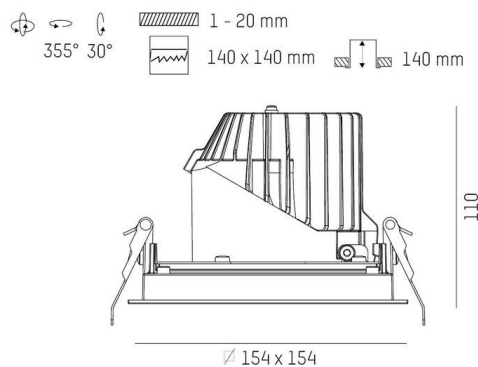

LIGHT DISTRIBUTION CURVE

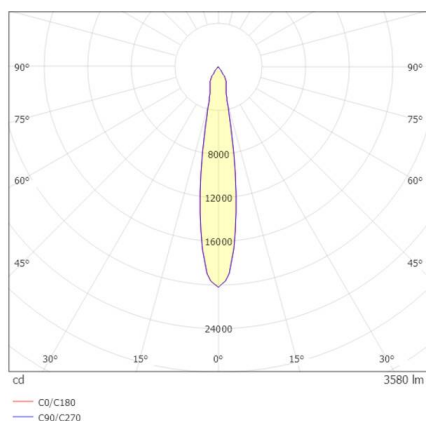

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.