


MOVA

695-11042134944002


MOVA M TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, grey, similar to RAL 9006, decor grey, high-efficiently vacuum deposited aluminium reflector beam 24°, light output direct, swiveling 350°, tilting 90°, with converter, max. 500mA, dimmability: not dimmable, adapter/ceiling base grey, IP20



SKETCH

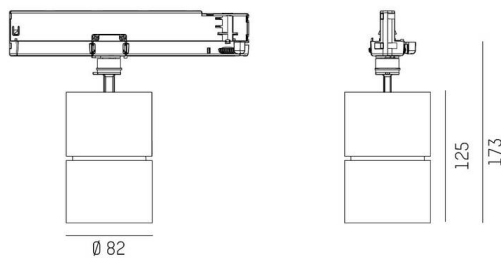

LIGHT DISTRIBUTION CURVE

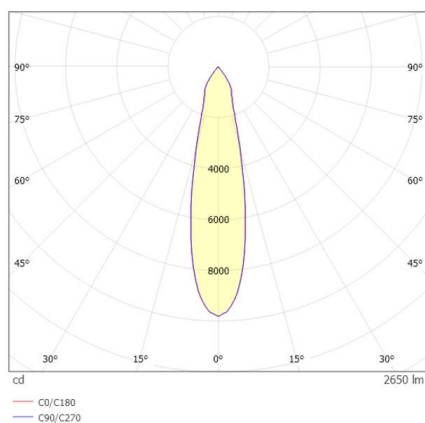

TECHNICAL DETAILS

Light source	LED
System performance [W]	18,5
Luminous flux [lm]	2650
Current sec. [mA]	500
Colour temperature	3000K
CRI	PREMIUM >90
Optics	vacuum deposited aluminium reflector
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle [°]	24°
Voltage	220-240V 50/60Hz
Length [mm]	170
Height [mm]	125
Diameter [mm]	82
IP protection class	IP20
IP protection class	protection cl. II
Material	aluminium
Colour of body	grey
RAL	9006
Colour of adapter / ceiling base	grey
Colour of decor	grey
Lifetime [h]	L80 B10 50 000
Energy efficiency class	C
Number of luminaires B16A	50
Net weight [kg]	0.58
EAN number	9010979847279



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.