



PILLE

737-10013ggdv2


PILLE PDI SUSPENSION made of aluminium, black, similar to RAL 9005, shade made of hand-blown glass grey grey, light output direct / indirect, with converter, max. 700mA, dimmability: DALI, cable black, adapter/ceiling base black, pendant length 3000mm, IP20

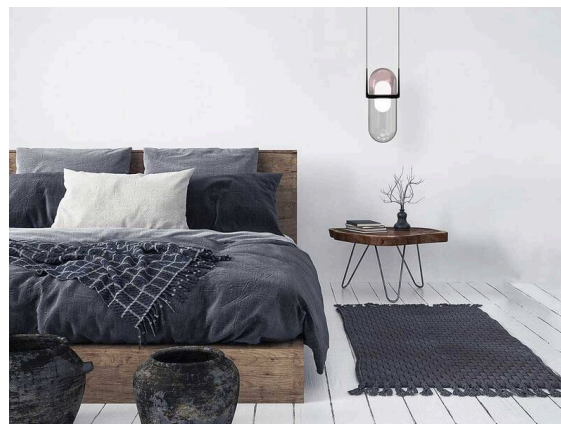

SKETCH

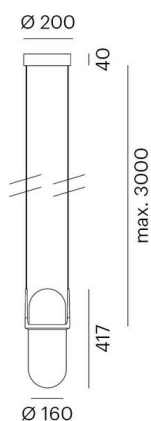

LIGHT DISTRIBUTION CURVE

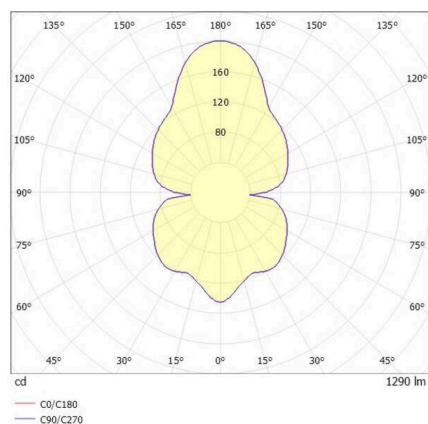

TECHNICAL DETAILS

Light source	LED
System performance [W]	27
Luminous flux [lm]	1290
Current sec. [mA]	700
Colour temperature	2700K
CRI	PREMIUM >90
Optics	hand-blown glass
Converter	with converter
Dimmability	DALI
Light emission area	direct / indirect
Voltage	220-240V 50/60Hz
Length [mm]	188,7
Height [mm]	417
Length pendant [mm]	3000
Diameter [mm]	160
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Colour of glass/shade	grey grey
Colour of adapter / ceiling base	black
Cable	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	50
Net weight [kg]	3.26
EAN number	9010979883017



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.