



## MUSO

222-00376

MUSO LINEAR SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9003, polycarbonate cover beam 120°, light output direct, with converter, max. 235mA, dimmability: not dimmable, IP54

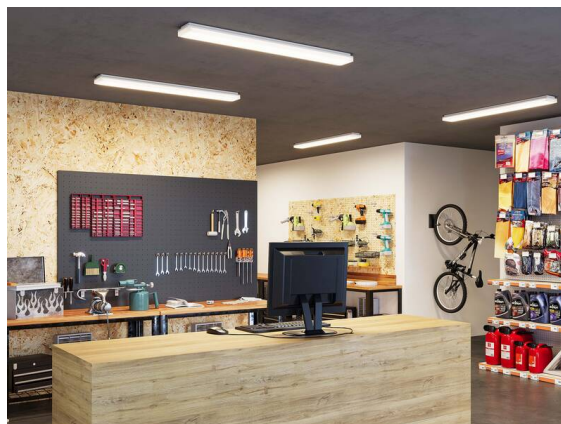


## SKETCH

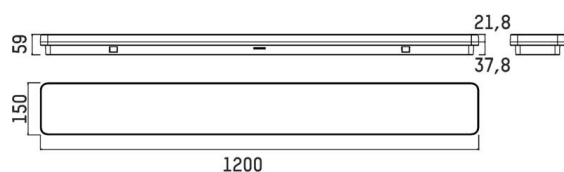

## TECHNICAL DETAILS

|                         |                         |
|-------------------------|-------------------------|
| Light source            | LED                     |
| System performance [W]  | 29,5/35,5/40,5          |
| Luminous flux [lm]      | 3710/4385/4920 (@5000K) |
| Current sec. [mA]       | 235                     |
| Colour temperature      | 3000K/4000K/5000K       |
| CRI                     | >80                     |
| Optics                  | polycarbonate cover     |
| Converter               | with converter          |
| Dimmability             | not dimmable            |
| Light emission area     | direct                  |
| Beam angle              | 120°                    |
| Voltage                 | 220-240V 50/60Hz        |
| Length [mm]             | 1200                    |
| Width [mm]              | 150                     |
| Height [mm]             | 59                      |
| IP protection class     | IP54                    |
| IP protection class     | protection cl. II       |
| IK value                | IK08                    |
| Material                | synthetic               |
| Colour of body          | white                   |
| RAL                     | 9003                    |
| Lifetime [h]            | L80 B10 50 000          |
| Energy efficiency class | D                       |
| EAN number              | 9010979616752           |

## LIGHT DISTRIBUTION CURVE

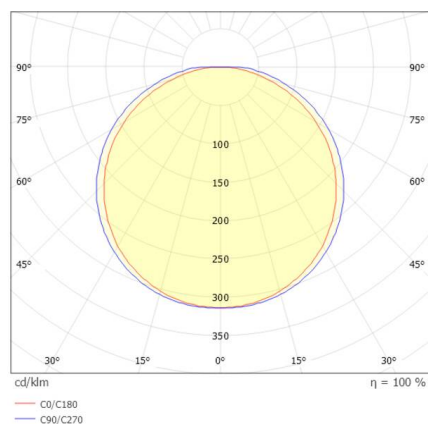

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.