


TRIGGA

662-018020529480


TRIGGA LOON MINI VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, black, similar to RAL 9005, anti-glare LFO lens due to microfaceted structure brown, beam 55°, light output direct, with converter, max. 350mA, dimmability: not dimmable, cable black, fabric, adapter/ceiling base grey, pendant length 1500mm, IP20



SKETCH

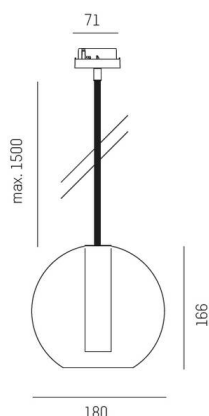

LIGHT DISTRIBUTION CURVE

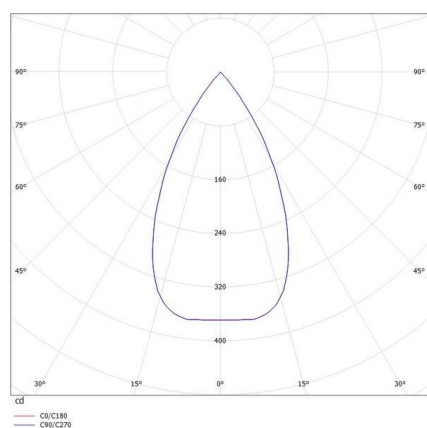

TECHNICAL DETAILS

Light source LED
System performance [W] 6
Luminous flux [lm] 290
Current sec. [mA] 350
Colour temperature 3000K
CRI >90
Optics LFO lens
Converter with converter
Dimmability not dimmable
Light emission area direct
Beam angle [°] 55°
Voltage 220-240V 50/60Hz

Length [mm] 256,8
Height [mm] 166
Length pendant [mm] 1500
Diameter [mm] 180
IP protection class IP20
IP protection class protection cl. I

Material aluminium
Colour of body black
RAL 9005
Colour of glass/shade brown
Colour of adapter / ceiling base grey
Cable black, fabric
Lifetime [h] L80 B10 50 000
Energy efficiency class G
Number of luminaires B16A 8

Net weight [kg] 1.19
EAN number 9008905778636



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.