


## DARK NIGHT

684-00206054306v3

DARK NIGHT MEDIUM R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, decor white, high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, UGR <16, without converter, max. 500/700/900mA, dimmability: see converter, IP20

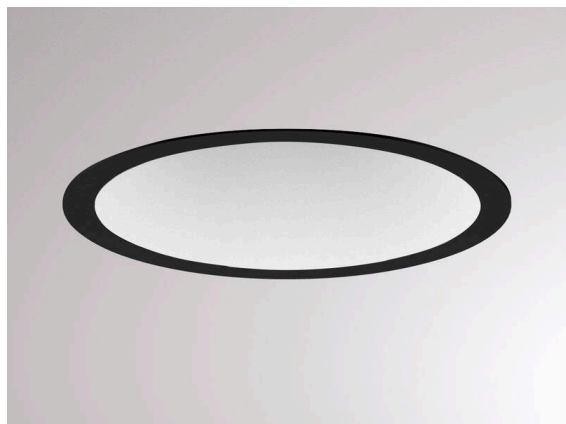

## TECHNICAL DETAILS

|                         |                                      |
|-------------------------|--------------------------------------|
| Light source            | LED 18/25/33W                        |
| Luminous flux [lm]      | 1950/2620/3230                       |
| Current sec. [mA]       | 500/700/900                          |
| Colour temperature      | 2700K                                |
| CRI                     | PREMIUM>90                           |
| UGR                     | <16                                  |
| Optics                  | vacuum deposited aluminium reflector |
| Converter               | without converter                    |
| Dimmability             | see converter                        |
| Light emission area     | direct                               |
| Beam angle              | 40°                                  |
| Length [mm]             | 157                                  |
| Height [mm]             | 111                                  |
| Diameter [mm]           | 157                                  |
| Ceiling cutout [mm]     | 150                                  |
| Ceiling thickness [mm]  | 1-25                                 |
| Mounting depth [mm]     | 141                                  |
| IP protection class     | IP20                                 |
| IP protection class     | protection cl. II                    |
| IK value                | IK02                                 |
| Material                | aluminium                            |
| Colour of body          | black                                |
| RAL                     | 9005                                 |
| Colour of decor         | white                                |
| Lifetime [h]            | L80 B10 50 000                       |
| Energy efficiency class | E                                    |
| Net weight [kg]         | 0.35                                 |
| EAN number              | 9010979893788                        |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.