


LENS 2

606-001529720011966v

LENS 2 SHORT DOUBLE T CLIP-ON DESK LAMP made of aluminium, black, similar to RAL 9005, Hybrid optics consisting of free-form lenses, micro-faceted high-gloss reflectors and black anti-glare louvre beam for double workplace, base plate black, light output direkt/- indirekt 20:80, UGR <16, with converter, dimmability: Sensor Matrix, With motion detector including individual workstation detection and multi-sensor daylight control, IP20 with glass touch control panel with integrated display / lower edge of control panel 450mm,




SKETCH

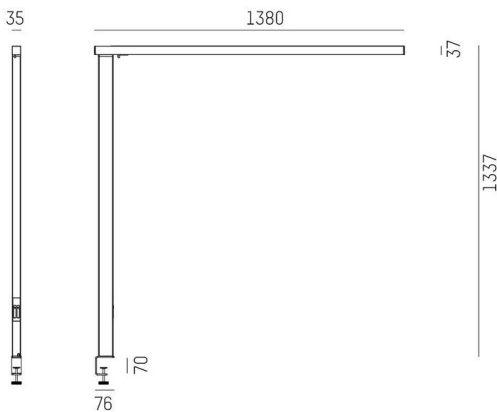

TECHNICAL DETAILS

| | |
|---------------------------|--|
| Light source | LED |
| System performance [W] | 76/82/89/110 |
| Luminous flux [lm] | 11630/12600/13600/16420 |
| Colour temperature | 3000K |
| CRI | >80 |
| UGR | <16 |
| Optics | Hybrid optics consisting of free-form lenses, micro-faceted high-gloss reflectors and black anti-glare louvre with converter |
| Converter | Sensor Matrix |
| Dimmability | direkt/- indirekt 20:80 for double workplace |
| Light emission area | 220-240V 50/60Hz |
| Beam angle | With motion detector including individual workstation detection and multi-sensor daylight control |
| Voltage | |
| Motion detector | |
| Length [mm] | 1381 |
| Width [mm] | 36 |
| Height [mm] | 1340 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| Material | aluminium |
| Colour of body | black |
| Colour Base Plate | black |
| RAL | 9005 |
| Lifetime [h] | L80 B10 100 000 |
| Energy efficiency class | C |
| Number of luminaires B16A | 25 |
| Net weight [kg] | 7.34 |
| EAN number | 9010979931220 |

LIGHT DISTRIBUTION CURVE

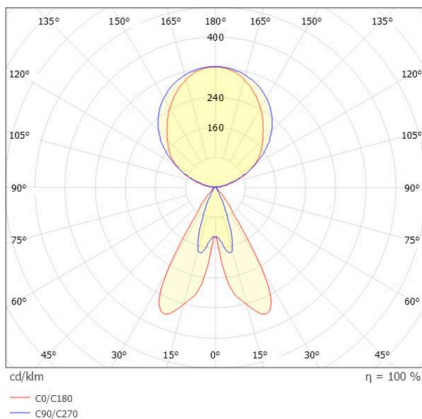

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.