


OTIN

227-184413024190060


OTIN SOL XL ROUND SDI SURFACE MOUNTED DOWNLIGHT made of aluminium, black, similar to RAL 9005, decor Faceted plastic reflector high-gloss, opal diffuser beam Wide beam (BS), light output direct / indirect, with converter, max. 300mA, dimmability: not dimmable, through wiring 2,5mm², IP20 with X-Change light source, replaceable without tools,



SKETCH

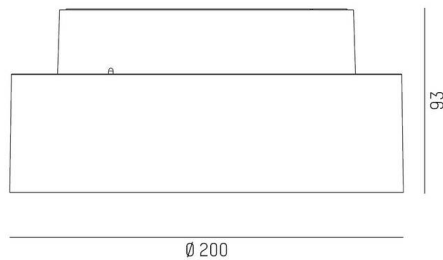

LIGHT DISTRIBUTION CURVE

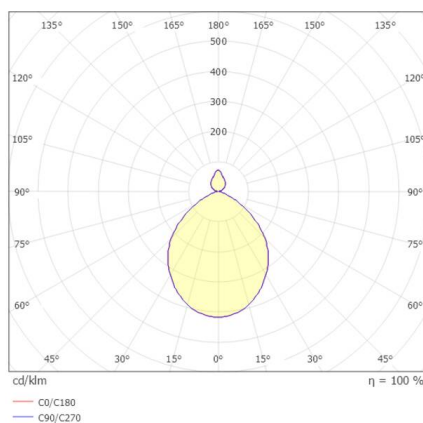

TECHNICAL DETAILS

Light source LED
 System performance [W] 14,5
 Luminous flux [lm] 2470
 Current sec. [mA] 300
 Colour temperature 3000K
 CRI >80
 Optics opal diffuser
 Converter with converter
 Dimmability not dimmable
 Light emission area direct / indirect
 Beam angle Wide beam (BS)
 Voltage 220-240V 50/60Hz
 Through wiring 2,5mm²

Height [mm] 93
 Diameter [mm] 200
 IP protection class IP20
 IP protection class protection cl. I
 IK value IK02

Material aluminium
 Colour of body black
 RAL 9005
 Colour of decor Faceted plastic reflector high-gloss
 Lifetime [h] L90 B10 100 000
 Energy efficiency class C
 Number of luminaires B16A 50

Net weight [kg] 4.64
 EAN number 9008905907524



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.