


OTIN

227-164413024190060


OTIN SOL XL ROUND PDI SUSPENSION made of aluminium, black, similar to RAL 9005, decor Faceted plastic reflector high-gloss, opal diffuser beam Wide beam (BS), light output direct / indirect, with converter, max. 300mA, dimmability: not dimmable, through wiring 2,5mm², cable black, soft-touch, adapter/ceiling base black, IP20 with X-Change light source, replaceable without tools,



SKETCH



LIGHT DISTRIBUTION CURVE

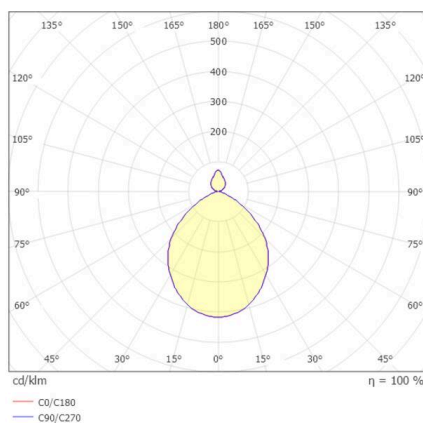

TECHNICAL DETAILS

Light source	LED
System performance [W]	14,5
Luminous flux [lm]	2470
Current sec. [mA]	300
Colour temperature	3000K
CRI	>80
Optics	opal diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Beam angle	Wide beam (BS)
Voltage	220-240V 50/60Hz
Through wiring	2,5mm²

Length [mm]	1500
Height [mm]	93
Diameter [mm]	200
IP protection class	IP20
IP protection class	protection cl. II
IK value	IK02

Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Colour of decor	Faceted plastic reflector high-gloss
Cable	black, soft-touch
Lifetime [h]	L90 B10 100 000
Energy efficiency class	C
Number of luminaires B16A	50

Net weight [kg]	4.54
EAN number	9008905935336



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.