


## OTIN

227-064413022190060


OTIN SOL XL ROUND PD SUSPENSION made of aluminium, black, similar to RAL 9005, decor Faceted plastic reflector high-gloss, opal diffuser beam Wide beam (BS), light output direct, with converter, max. 300mA, dimmability: not dimmable, through wiring 2,5mm², cable black, soft-touch, adapter/ceiling base black, IP20 with X-Change light source, replaceable without tools,

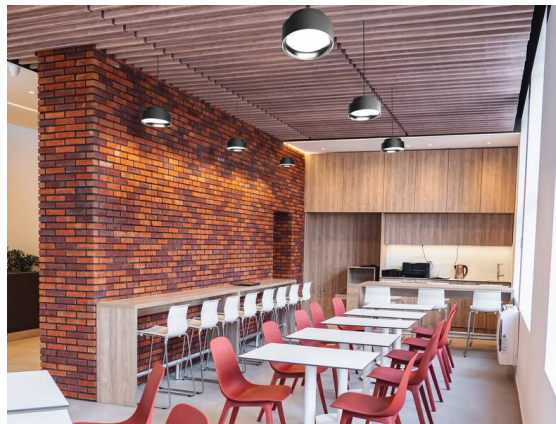

## SKETCH



## LIGHT DISTRIBUTION CURVE

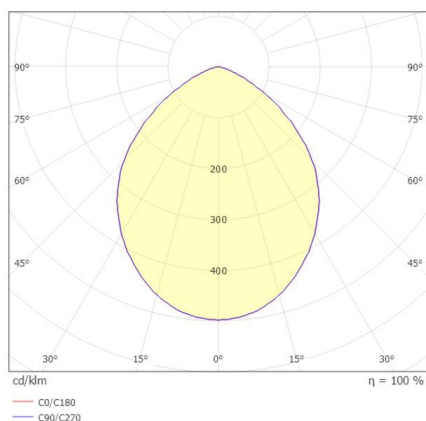

## TECHNICAL DETAILS

|                        |                  |
|------------------------|------------------|
| Light source           | LED              |
| System performance [W] | 12,5             |
| Luminous flux [lm]     | 2070             |
| Current sec. [mA]      | 300              |
| Colour temperature     | 3000K            |
| CRI                    | >80              |
| Optics                 | opal diffuser    |
| Converter              | with converter   |
| Dimmability            | not dimmable     |
| Light emission area    | direct           |
| Beam angle             | Wide beam (BS)   |
| Voltage                | 220-240V 50/60Hz |
| Through wiring         | 2,5mm²           |

|                     |                   |
|---------------------|-------------------|
| Length [mm]         | 1500              |
| Height [mm]         | 93                |
| Diameter [mm]       | 200               |
| IP protection class | IP20              |
| IP protection class | protection cl. II |
| IK value            | IK02              |

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Material                         | aluminium                            |
| Colour of body                   | black                                |
| RAL                              | 9005                                 |
| Colour of adapter / ceiling base | black                                |
| Colour of decor                  | Faceted plastic reflector high-gloss |
| Cable                            | black, soft-touch                    |
| Lifetime [h]                     | L90 B10 100 000                      |
| Energy efficiency class          | C                                    |
| Number of luminaires B16A        | 50                                   |

|                 |               |
|-----------------|---------------|
| Net weight [kg] | 2.19          |
| EAN number      | 9008905935329 |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.