

LOG IN/LOG OUT 2.1


728-10500311480d



TECHNICAL DETAILS


Light source	LED
System performance [W]	17
Luminous flux [lm]	1960
Colour temperature	4000K
CRI	>80
Optics	PMMA opal diffuser with converter
Converter	DALI
Dimmability	direct
Light emission area	220-240V 50/60Hz
Voltage	3x1,5mm² + 2x0,75mm²
Through wiring	
Length [mm]	326X326
Width [mm]	76
Height [mm]	90
IP protection class	IP20
IP protection class	protection cl. I
Material	die-cast aluminium
Colour of body	aluminium anodised
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	50
Net weight [kg]	2.86
EAN number	9010506144871

SKETCH

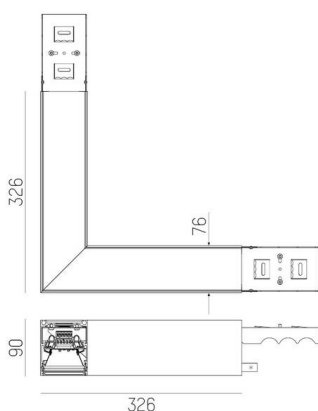

Energy label

LIGHT DISTRIBUTION CURVE

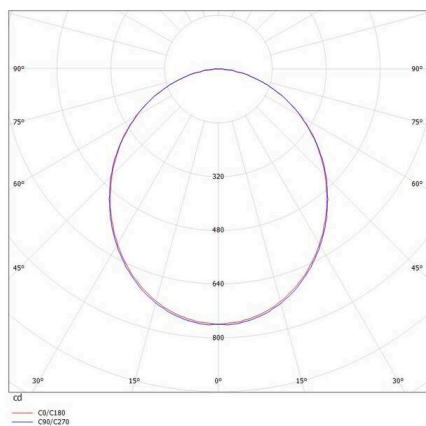

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.