


TRAIL

610-1251031416050

TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, white, similar to RAL 9016, linear optics beam 30°, light output direct, UGR <28, with converter, max. 600mA, dimmability: not dimmable, through wiring 7-polig, IP20



SKETCH

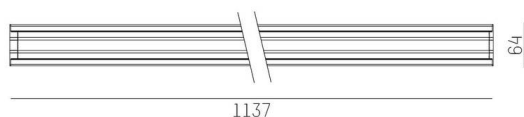


TECHNICAL DETAILS

Light source	LED
System performance [W]	61
Luminous flux [lm]	9520
Current sec. [mA]	600
Colour temperature	6500K
CRI	>80
UGR	<28
Optics	high quality linear optics
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	30°
Voltage	220-240V 50/60Hz
Through wiring	7-polig
Length [mm]	1137
Width [mm]	64
Height [mm]	16
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK06
Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L90 B10 70 000
Ambient temperature	from -20° to +50°
Energy efficiency class	C
Number of luminaires B16A	22
IFS	True
Net weight [kg]	1.17
EAN number	9010506594249



Energy label

LIGHT DISTRIBUTION CURVE

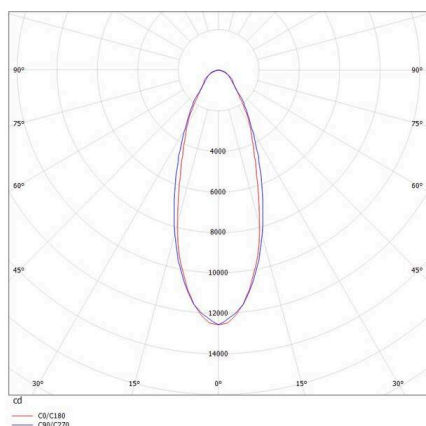

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.