


MAG

222-00148

MAG TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9003, high quality glass lens beam 40°, light output direct, UGR <16, swiveling 350°, tilting 90°, with converter, max. 350mA, dimmability: TRIAC, IP20




SKETCH

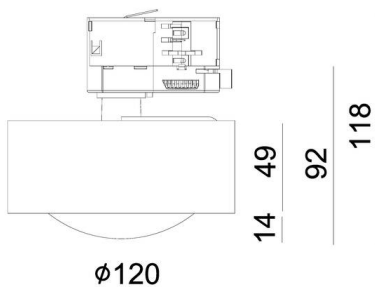

TECHNICAL DETAILS

Light source	LED
System performance [W]	14
Luminous flux [lm]	1290
Current sec. [mA]	350
Colour temperature	2700K
CRI	>90
UGR	<16
Optics	high quality glass lens
Converter	with converter
Dimmability	TRIAC
Light emission area	direct
Beam angle	40°
Voltage	220-240V 50/60Hz
Height [mm]	118
Diameter [mm]	120
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	56
Net weight [kg]	0.72
EAN number	9010870561267

LIGHT DISTRIBUTION CURVE

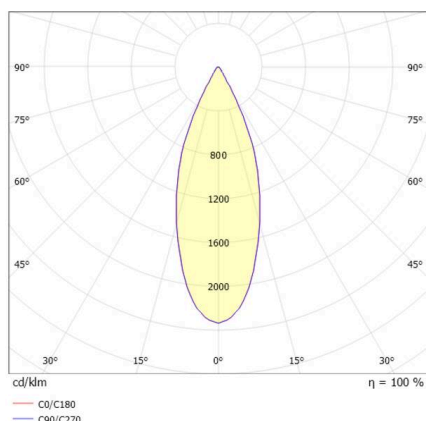

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.