

TUNE

157-0226070114442

TUNE M GLAS EXTENSION HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, grey, similar to RAL 9006, high quality plastic lens beam 75°, accessoire: glass, light output direct, UGR <25, with converter, max. 4150mA, dimmability: DALI 2, motion swarm, IP55 incl. power supply for sensor standalone versions,



TECHNICAL DETAILS


Light source	LED
System performance [W]	205
Luminous flux [lm]	30030
Current sec. [mA]	4150
Colour temperature	4000K
CRI	>80
UGR	<25
Optics	high quality plastic lens
Converter	with converter
Dimmability	DALI 2, motion swarm
Light emission area	direct
Beam angle	75°
Voltage	220-240V 50/60Hz

Length [mm]	280
Height [mm]	186
Diameter [mm]	360
IP protection class	IP55
IP protection class	protection cl. I
IK value	IK08

Material	aluminium
Colour of body	grey
RAL	9006
Lifetime [h]	L80 B10 70 000
Ambient temperature	from -30° to +45°
Energy efficiency class	D
Number of luminaires B16A	7


Net weight [kg]	2.03
EAN number	9010506916638

SKETCH

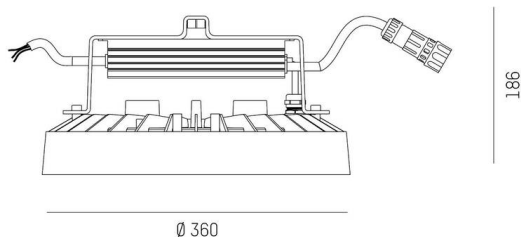

Energy label

LIGHT DISTRIBUTION CURVE

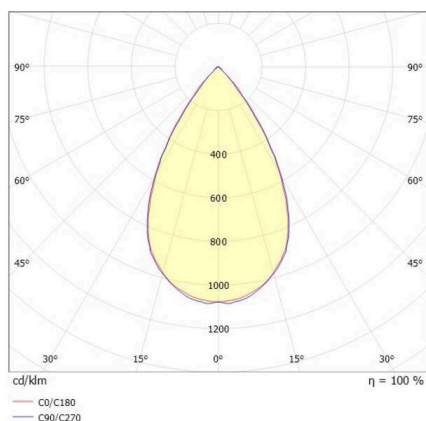

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.