

TUNE

157-0226120116442

TUNE M GLAS EXTENSION HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°, accessoire: glass, light output direct, UGR <22, with converter, max. 2700mA, dimmability: DALI 2, motion swarm, IP55 incl. power supply for sensor standalone versions



TECHNICAL DETAILS

Light source	LED
System performance [W]	132
Luminous flux [lm]	20250
Current sec. [mA]	2700
Colour temperature	6500K
CRI	>80
UGR	<22
Optics	high quality plastic lens
Converter	with converter
Dimmability	DALI 2, motion swarm
Light emission area	direct
Beam angle	75°
Voltage	220-240V 50/60Hz

Length [mm]	280
Height [mm]	186
Diameter [mm]	360
IP protection class	IP55
IP protection class	protection cl. I
IK value	IK08

Material	aluminium
Colour of body	grey
RAL	9006
Lifetime [h]	L80 B10 70 000
Ambient temperature	from -30° to +50°
Energy efficiency class	D
Number of luminaires B16A	7


Net weight [kg]	2.03
EAN number	9010506916843

SKETCH



Energy label

LIGHT DISTRIBUTION CURVE

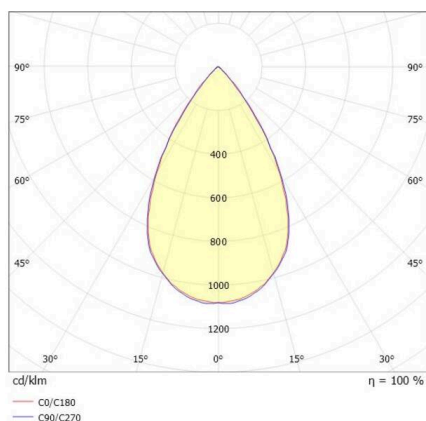

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.