



TUNE

157-022013011644a

TUNE M GLAS HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°,
 accessoire: glass, light output direct, UGR <22, with converter, max. 2300mA, dimmability: switchable, 1-10V, IP66

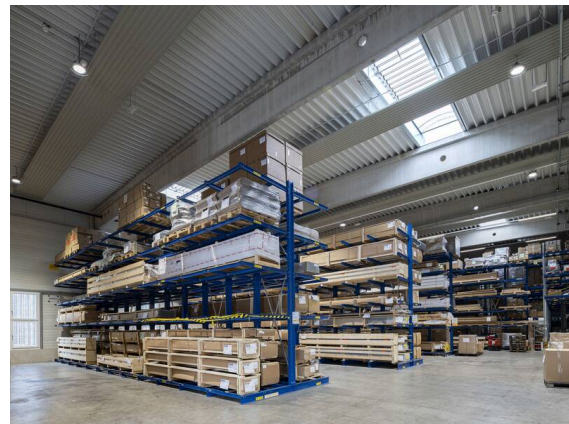


SKETCH

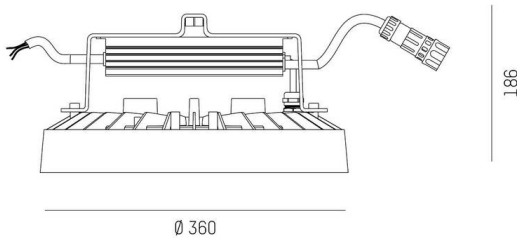

TECHNICAL DETAILS

Light source	LED
System performance [W]	113
Luminous flux [lm]	17660
Current sec. [mA]	2300
Colour temperature	6500K
CRI	>80
UGR	<22
Optics	high quality plastic lens
Converter	with converter
Dimmability	switchable, 1-10V
Light emission area	direct
Beam angle	75°
Voltage	220-240V 50/60Hz
Length [mm]	362,1
Height [mm]	186
Diameter [mm]	360
IP protection class	IP66
IP protection class	protection cl. I
IK value	IK08
Material	aluminium
Colour of body	grey
RAL	9006
Lifetime [h]	L80 B10 70 000
Ambient temperature	from -30° to +50°
Energy efficiency class	D
Number of luminaires B16A	7
IFS	False
Net weight [kg]	1.95
EAN number	9010506735277

LIGHT DISTRIBUTION CURVE

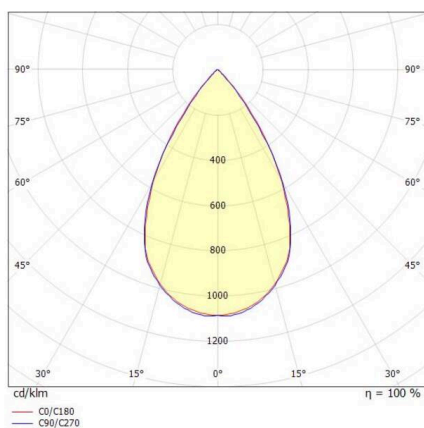

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.