


## MC BAFFEL

A50-0149511243060

BAFFEL SPOT TRACK SPOTLIGHT WITH 3 PH ADAPTER black, similar to RAL 9005, decor black, high-efficiently vacuum deposited synthetic reflector beam 17°, accessoire: glass, light output direct, swiveling 350°, tilting 90°, with converter, max. 700mA, dimmability: not dimmable, cable transparent, adapter/ceiling base black, pendant length 1500mm, IP20




## SKETCH

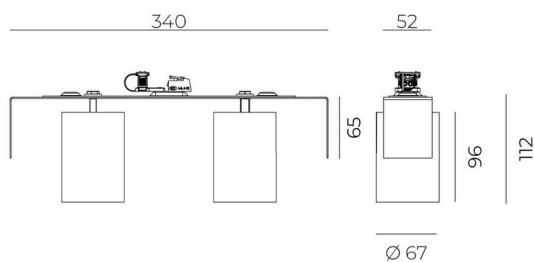

## TECHNICAL DETAILS

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Light source                     | LED                                  |
| System performance [W]           | 2X14                                 |
| Luminous flux [lm]               | 2x 1370                              |
| Current sec. [mA]                | 700                                  |
| Colour temperature               | 2700K                                |
| CRI                              | PREMIUM>90                           |
| Optics                           | vacuum deposited synthetic reflector |
| Converter                        | with converter                       |
| Dimmability                      | not dimmable                         |
| Light emission area              | direct                               |
| Beam angle [°]                   | 17°                                  |
| Voltage                          | 220-240V 50/60Hz                     |
| Length [mm]                      | 67                                   |
| Width [mm]                       | 52                                   |
| Height [mm]                      | 150                                  |
| Length pendant [mm]              | 1500                                 |
| IP protection class              | IP20                                 |
| IP protection class              | protection cl. II                    |
| Colour of body                   | black                                |
| RAL                              | 9005                                 |
| Colour of adapter / ceiling base | black                                |
| Colour of decor                  | black                                |
| Cable                            | transparent                          |
| Lifetime [h]                     | L80 B10 50 000                       |
| Energy efficiency class          | E                                    |
| Net weight [kg]                  | 1.57                                 |
| EAN number                       | 9010979756359                        |

## LIGHT DISTRIBUTION CURVE

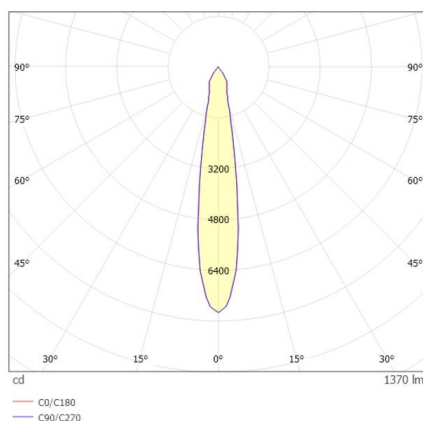

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.